


VicOffice Wall

WORKSPACES

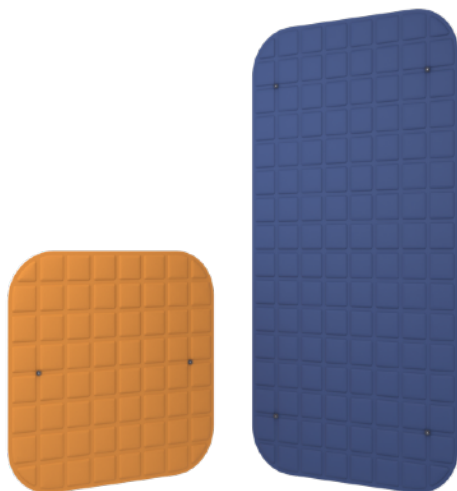


Description

VicOffice Wall is a thin acoustic panel that can be easily mounted and dismantled to any glazed panel, i.e. not compromising the glazing cleaning process. Being a thin panel, and therefore having low performance on medium frequencies, Vicoustic has developed its installation mechanism to create an air-gap between the glaze and VicOffice Wall, and in this way increase its performance on the medium/High frequencies, exactly where speech frequencies are.

Features

- Premium high density PET Wool
- High Performance in medium and high frequencies
- Light weight
- Easy to install
- Easy to clean and maintain

Performance

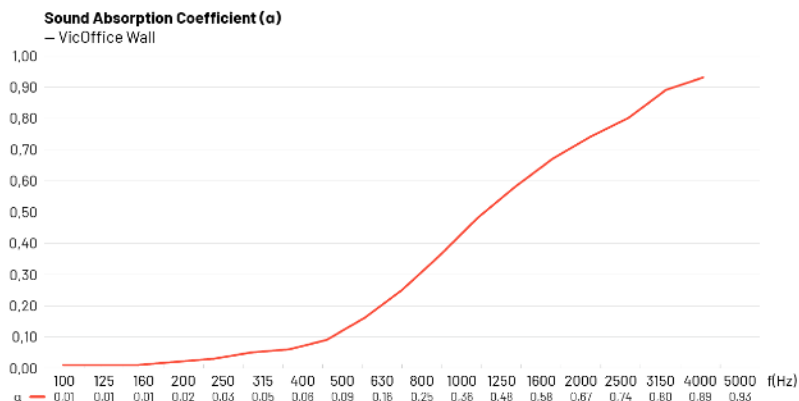

NRC: 0.30

Available Finishes*

Solid Colors

* Different batches may show a color variation

Dimensions**

- a) 595x595x10 mm / 23.42"x23.42"x0.39";
- b) 1190x595x10 mm / 42.91"x23.42"x0.39".

** For each panel. Please notice that the dimensions of these panels have a tolerance of +/- 2mm

Packing Information

Units per box: 1

- Box:** a) 606x606x40 mm / 23.86"/23.86"/1.57";
- b) 1201x606x37 / 47.28"/23.86"/1.46".

Box Gross Weight:

Technical Information

Material: VicPet Wool



Fire

Rating:

- Europe: Euroclass B -s2, d0
- USA: Class A (ASTM-E84) ; Flame Spread: 0; Smoke Development: 300.

Installation: Removable Suction Cups

More information:

vicoustic.com/product/vicoffice-wall