


VicStudio VMT Box


Installation Manual

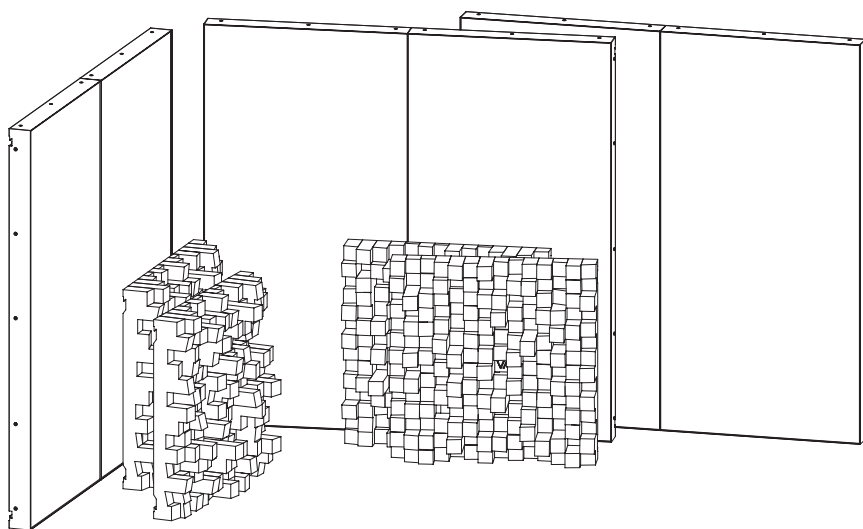


V/COUSTIC

✓ MATERIAL NEEDED


Included

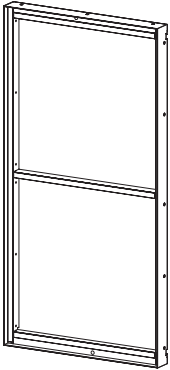


VicSpacer x6



FlatPanel VMT x6




VicPET x12



Multisuser DC2 x4



Glue x1



VicFix Corner 2 +2



VicFix J Profile 80mm | 3.14" x4




G1_Velcro Hook



G2_Velcro Loop

Not Included



Level




Measuring Tape



Drill



Wall Plugs and Screws




6mm Phillips Screwdriver

Multifuser DC2 Installation


1

Apply the glue on the back of the acoustic panel. Do not wait longer than 10 minutes after applying the glue to attach the panel to the wall.



2

Place the panel on the suitably chose position on the wall. Once in the desired place, press firmly against the wall. You can help fix the product while gluing, with the help of adhesive tape.



!

To ensure that you maximise the strength of the glue, don't make any adjustments to the panel after bonding

Wall and ceiling surfaces should be examined prior to installation, ensuring they are clean, smooth, and dry. If you have unpainted gypsum board surfaces, these should be primed with a drywall primer (or another material manufactured especially for the purpose), to equalize the absorption between the gypsum board face paper, joint compound, and skin coating materials. You should then apply the paint, and allow air circulation in order to dry the paint within the time frame specified by the paint manufacturer. Please ensure the paint is dry before installing the acoustic panel. Make sure the room has all the necessary conditions to receive the acoustic panels. After you apply the glue on the back of each acoustic panel, please ensure you hold the acoustic panel against the wall the required time, to ensure it stays fixed in place. This method is also applicable to ceiling installations.



VicSpacer Installation

1


Mark the drill holes of the VicSpacers according to the diagram.

In the case of installing two or more units, pay attention to the spacing between units.


The dimensions marked between VicSpacers are for use of only one metal joint between them.

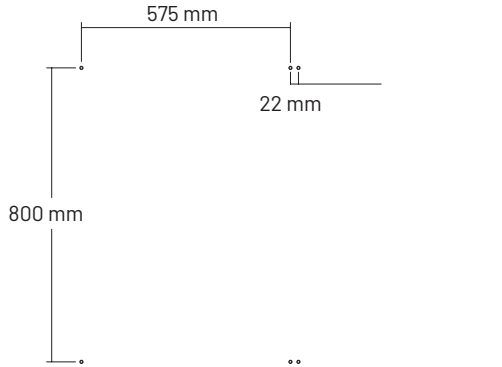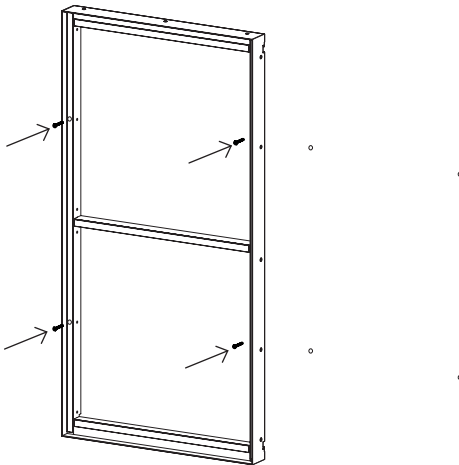**2**

3

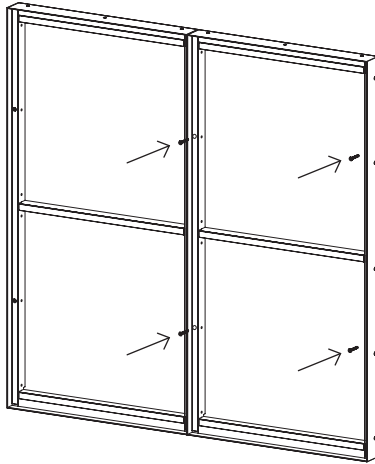



4

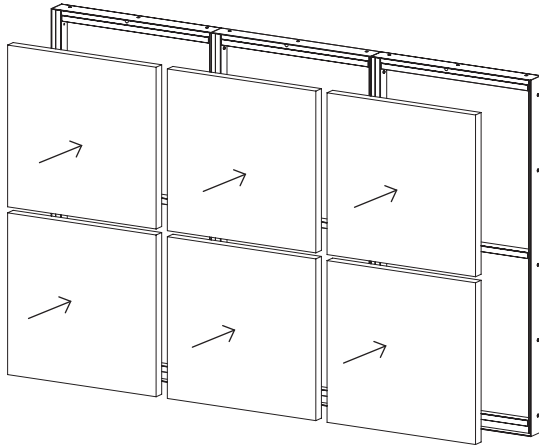



5

Apply the FlatPanel VMT. (Wall and Ceiling)


If you need a stronger attachment of the Flat Panel VMT to the VicSpacer, use the Velcro G2 (hook) supplied with the product. Apply Velcro G2 over the Velcro G1 already affixed to the VicSpacer, remove the adhesive protector and press the Flat Panel VMT to ensure an even and precise adherence.

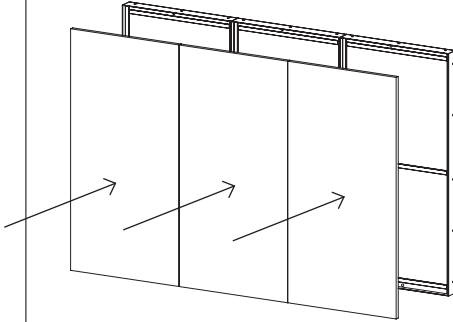


VicFix Corner Installation

1

2

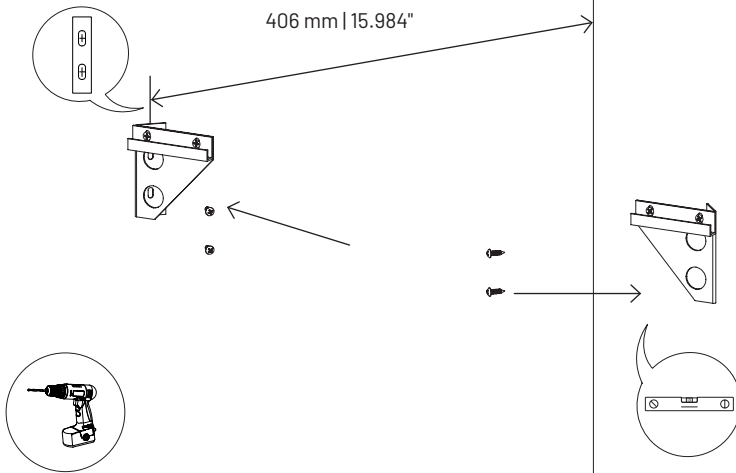

3

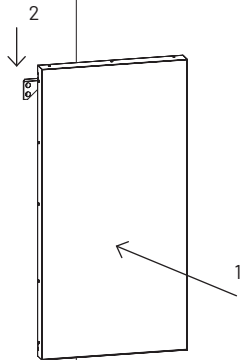

Main Office, R&D & Logistics

Avenida do Pólo 3, N.º 159, Carvalhosa
4590-137 Paços de Ferreira, Portugal

Office

Rua Quinta do Bom Retiro N.º 16, Armazém 9
2820-690 Charneca da Caparica, Portugal
T (+351) 212 964 100

Info and Sales

E sales@vicoustic.com

www.vicoustic.com

V//COUSTIC
INNOVATIVE ACOUSTIC SOLUTIONS

© Vicoustic, 2021 | V2

No parts of this document might be copied and/or published without written consent of Vicoustic.