

## Set up, connect and go: audio lectern for multimedia presentations

The SPEECH-204 is an efficient and portable lectern with built-in mixing amplifier and integrated speaker system in 2-way technology. The elaborate functionality and high sound quality ensure a successful and professional performance and thus contribute to the success of every event. The SPEECH-204 is set up and ready for use in no time and ideally suited for multimedia presentations in hotels, houses of worship, conference rooms and convention centres.

### SPEECH-204

Order No. 0179130


#### Professional lectern with integrated 2-channel multifrequency receiver unit with UHF PLL technology

- Built-in high-performance mixing amplifier and speaker system, 75 W
- 2 x 16 selectable UHF frequencies (863.1-864.9 MHz)
- Integrated limiter
- 3 inputs via comb. jack mic (XLR)/line (6.3 mm jack) with 3-way equalizer and gain control
- 1 stereo line input via RCA jacks with gain control
- 2 shock-absorbing XLR jacks on the top part of the lectern for 2 optional gooseneck microphones (use one microphone input each), with phantom power
- 1 stereo line output via RCA jacks
- 2-way speaker system
- Integrated light in the top part of the lectern
- Column with 2 document compartments and 2 storage compartments
- 2 castors

Supplied w/o gooseneck microphone. Matching microphone EMG-650P is available at option.

Matching microphone transmitters or pocket transmitters are available at option, e.g. TXA-800HSE or TXA-800HT.

Licence-free in the EU.

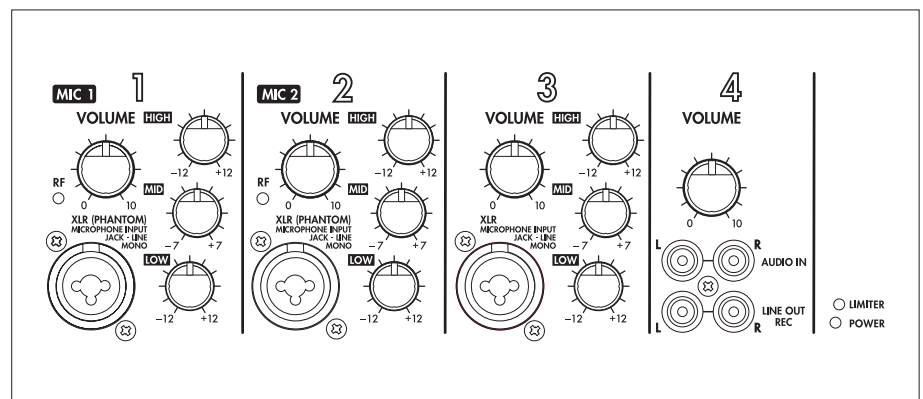

Model	SPEECH-204
Rated power ( $P_{RMS}$ )	75 W
Peak output power	100 W
Frequency range	60-20,000 Hz
Carrier frequency	863.1-864.9 MHz
Operating range	≈ 25 m
Inputs	15 mV (mic 1), 5 mV (mic 2-3), 220 mV (line 1-3), 250 mV (line)
Equalizer, bass	±12 dB/60 Hz
Equalizer, midrange	±7 dB/1 kHz
Equalizer, treble	±12 dB/15 kHz
Power supply	~ 230 V/50 Hz/180 VA
Dimensions	540 x 1140 x 430 mm
Weight	33 kg
Connections	3 x XLR (mic), 3 x 6.3 mm jack (line), 1 x RCA L/R (line in), 1 x RCA L/R (line out)

