

### Wall-mounted PA volume controls

- Recessed control to prevent unintentional readjustment
- Attenuation in 11 steps and OFF
- Audio transformer for 100 V line technique
- White plastic front panel (removable) and knob
- Flush mounting in standard hollow wall boxes
- Surface mounting with matching housing ATT-200, available at option




Model	Order No.	Frequency range	Power rating	Priority facility	Dimensions	Mounting depth	Weight	Surface-mounted housing
ATT-212H/WS	0176110	50-18,000 Hz	12 W	no	85 x 85 x 43 mm	35 mm	150 g	ATT-200
ATT-224H/WS	0176120	50-18,000 Hz	24 W	no	85 x 85 x 45 mm	37 mm	160 g	ATT-200
ATT-235H/WS	0176130	50-18,000 Hz	35 W	no	85 x 85 x 45 mm	34 mm	155 g	ATT-200
ATT-250H/WS	0176140	50-18,000 Hz	50 W	no	85 x 85 x 50 mm	42 mm	257 g	ATT-200
ATT-2100H/WS	0176150	50-18,000 Hz	100 W	no	85 x 85 x 50 mm	42 mm	250 g	ATT-200

### Wall-mounted PA volume control with programme selector and 24 V emergency priority relay

#### relay

- Attenuation in 10 steps, position 0 is OFF
- Switches one of 6 signal sources to one speaker output (programme)
- For 100 V line technique
- Snow-white plastic front panel and knob
- Flush mounting into standard 65 mm wall sockets
- Surface mouting with matching housing ATT-400, available at option
- Plug-in screw terminals

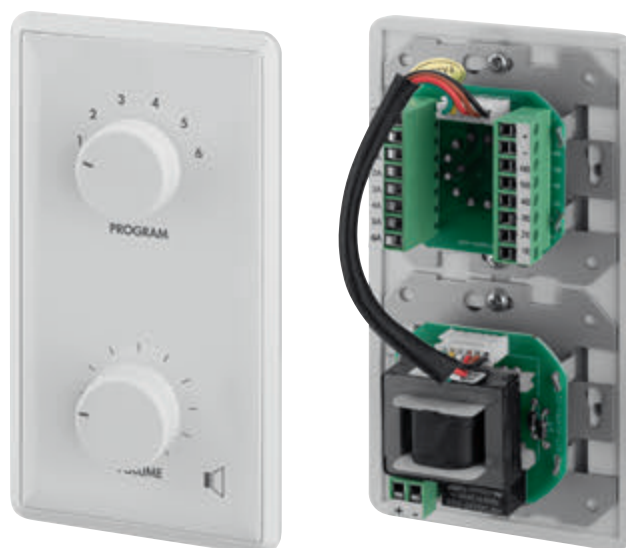

Model	Order No.	Frequency range	Power rating	Priority facility	Dimensions	Mounting depth	Weight	Surface-mounted housing
ATT-412PEU	0171460	50-18,000 Hz	12 W	yes	80 x 154 x 68 mm	45 mm	280 g	ATT-400
ATT-424PEU	0171470	50-18,000 Hz	24 W	yes	80 x 154 x 68 mm	45 mm	290 g	ATT-400