PA-1200

Order No. 0170710




4-zone mono PA mixing amplifier

- 1 x 120 W
- Silent operation due to fanless cooling concept
- Chime, continuous sound and wailing sound, automatic mute, chime can also be activated via external momentary push-button, 2-tone chime or 4-tone chime (selectable)
- Bass, treble and master controls, level display via LEDs
- 15 V phantom power for channels 2 and 3
- Insertions for various functions are available at option
- 482 mm (19") rack installation with mounting frame PA-1200RM, available at option



• Mains operation and 24 V emergency power operation

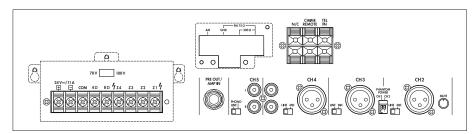

Model	PA-1200
Peak output power	170 W
Power rating	120 W
Inputs	1.5 mV/600 Ω (mic),
	150 mV/47 kΩ (line),
	1 mV/47 kΩ (phono)
Frequency range	80-15,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	> 60 dB (mic),
	> 70 dB (line)
THD	< 1%
Power supply	~ 230 V/50 Hz/280 VA,
	24 V/11 A
Dimensions	420 x 122 x 350 mm
Weight	12.28 kg

PA-1200RM

Order No. 0126740



Mounting frame, for installation of PA mixing amplifier PA-1200 into a 482 mm (19") rack, black lacquered.

Inside dimensions: 420 x 290 mm, 3 RU



*ASS-10.199.3

Audio Streaming Solutions with MondeF

Digital audio networks for everyone: Come and find out more about our new AoIP solution MondeF.

Start into the digital PA future now and become a certified MondeF partner.



www.monacor-international.com/mondef

MONACOR INTERNATIONAL INSTALLATION